


Instructions For:

Aluminum Banner Rail

Product Specifications

Graphic Width: 48" or less (can be cut for custom widths)

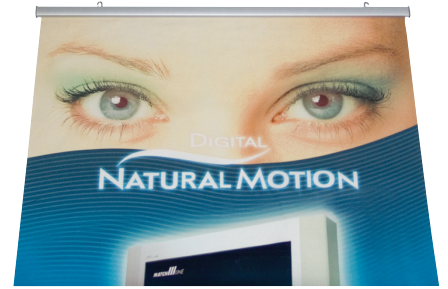

Product Parts

- 1 - Banner Rail
- 2 - Hooks
- 3 - End Caps



Step 1


Take all parts out of the box.

Lay the Banner Rail (1) flat on the floor.

(The Banner Rail (1) ships with the Hooks (2) and End Caps (3) installed. When removing items from the protective plastic, the Hooks and End Caps may come off the Banner Rail.)


Step 2

If attached, remove the End Caps (3). Locate the top of the Banner Rail (1) - the short side with the circular groove in which the Hooks (3) rest. Open the Banner Rail (1) by separating the front and back at the top edge. Insert the Graphic into the small opening made at the bottom edge of the Banner Rail. Be sure that the Graphic is held evenly along the length of the Banner Rail, and close the Banner Rail.

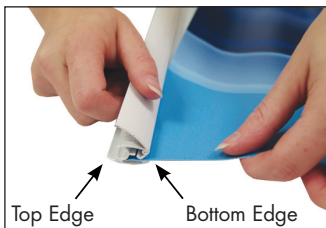

Step 3

If the Hooks (2) came off of the Banner Rail, carefully line up the round base of each Hook with the circular groove in the top of the Banner Rail and slide them both into place. Place the End Caps securely on both ends of the Banner Rail.

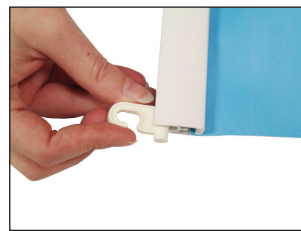

Step 4

Attach the Hanging Hardware (not included) to the wall or ceiling as desired. Attach the Hooks (2) to the Hanging Hardware.

